

# Submittal Data Sheet

#### Project Name: Location: Engineer: Submitted to: Submitted by: Reference:

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

#### Performance

Indoor Unit Model No:	FXMQ18PVJU
Rated Cooling Capacity (Btu/hr):	18000
Sensible Capacity (Btu/hr):	15695
Cooling Input Power (kW):	0.214
Rated Heating Capacity (Btu/hr):	20000
Heating Input Power (kW):	0.203

Indoor Unit Type:	Duct I	Mounted Standard Static (DC)
		Indoor: 80°F DB/67°F WB
Rated Cooling Condition	ons	Ambient: 95°F DB/75°F WB
Rated Heating Conditions		Indoor: 70°F DB/60°F WB
		Ambient: 47°F DB/43°F WB
Rated Piping Length (ft)		25
Rated Height Separation (ft)		0

### Indoor Unit Details

208-230/60/1ph
L1, L2, Ground
1.6
<i>OP) (A):</i> 15
11-13/16x39-3/8x27-9/16
N/A
80

Airflow Rate (CFM wet coil)	636//530
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	1-1/4
Sound Pressure Level (dBA):	41
Sound Power Level (dBA):	
External Static Pressure/Max (inWg):	0.4 / 0.8
Controller Name:	



### FXMQ18PVJU

Std U.S. Warranty: 7yrs Compressor, 1yrs Parts

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006

Daikin AC TRL Generated Submittal Data




# **Submittal Data Sheet**

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Approval:	
Date:	
Construction:	
Jnit #:	
Drawing #:	

### **Dimensional Drawing - Indoor Unit**

Daikin AC TRL Generated Submittal Data

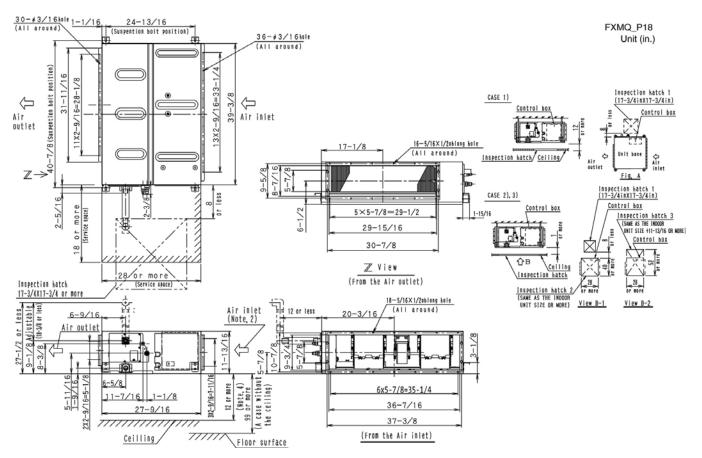

FXMQ18PVJU

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)