

Submittal Data Sheet

Project Name:			
Location:		Approvale	
Engineer:		Approval: Date:	
Submitted to:			
Submitted to: Submitted by:		Construction:	
Reference:		Unit #:	
Reference.		Drawing #:	
Performance			
Outdoor Unit Model No:	RXYQ240PBYD	Condensing Unit Type:	20-Ton VRV-III Heat Pump
	Non-Ducted / Ducted	gondonium g omit i) por	20 10 11
Rated Cooling Capacity (Btu/hr):	228000	Unit Combination: RXYQ120PBYD RXYQ120PBY	
Nom Cooling Capacity (Btu/hr):	288000		
Cooling Input Power (kW):	19.66	-	Indoor: 80°F DB/67°F WB
SEER:	N/A	Rated Cooling	Outdoor: 95°F DB/75°F WB
IEER:	18.2/16.1	Conditions	Guidon. 66 1 22,76 1 112
Rated Heating Capacity (Btu/hr):	257000		Indoor: 70°F DB/60°F WB
Nom Heating Capacity (Btu/hr):	324000	Rated Heating	Outdoor: 47°F DB/43°F WB
Heating Input Power (kW):	21.52	Conditions	Outdoor. 17 1 22, 10 1 VV2
Heating COP (Btu/hr / Btu/hr):	3.6/3.5	Rated Piping Length (fi	t) 100 / 50
HSPF:	N/A	Rated Height Difference (ft) 007 50	
Heating COP 17F (Btu/hr / Btu/hr):	2.55/2.35	Nated Height Billerene	0 (11)
Condensing Unit Details Power Supply (V/Hz/Ph):	460/60/3ph	Compressor Type:	Inverter
Power Supply Connections:	L1, L2, L3 Ground	Capacity Control Rang	e (%): 7 - 100
Min. Circuit Amps MCA (A):	21+21	Capacity Index Limit: 120 - 312 (130%)	
Max. Overcurrent Protection (MOP)(A	<i>):</i> 25+25	Airflow Rate (CFM):	8,230+8,230
Max. Starting Current MSC(A):	78	Gas Pipe Connection (<i>inch):</i> 1-3/8
Rated Load Amps RLA (A):	(5.4+8.4) x 2	Liquid Pipe Connection (inch): 5/8	
Dimensions Height (Inch):	66-1/8	H/L Pressure Connection (inch):	
Dimensions Width (Inch):	97-3/4	H/L Equalizing Connection (inch):	
Dimensions Depth (Inch):	30-1/8	Sound Pressure Level (dBA): 63	
Net Weight (lbs):	633+633		
		Max. No. of Indoor Uni	ts: 41
Outline Date !!»			
System Details	D 440A	Cooling Operation Don	22 410
Refrigerant Type:	R-410A	Cooling Operation Range (°F): 23 - 110	
Holding Refrigerant Charge (lbs):	22.1+22.1	Cooling Range w/Baffle (°F): Heating Operation Range (°F): 0 - 77 / (-4) - 60	
Additional Charge (lbs/ft):	install data	<u> </u>	• , ,
Pre-charge Piping (Length ft):	<u>-</u>	Heating Range w/Baffle	⊌(<i>Г).</i>
Max. Pipe Length (Total ft):	164 ft (205 ft) / 205 ft		
Max. Pipe Length (Vertical ft): Max Height Seperation (Ind to Ind ft):	164 ft (295 ft) / 295 ft		




Submittal Data Sheet

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

Dimensional Drawing - Condensing Unit

RXYQ240PBYD

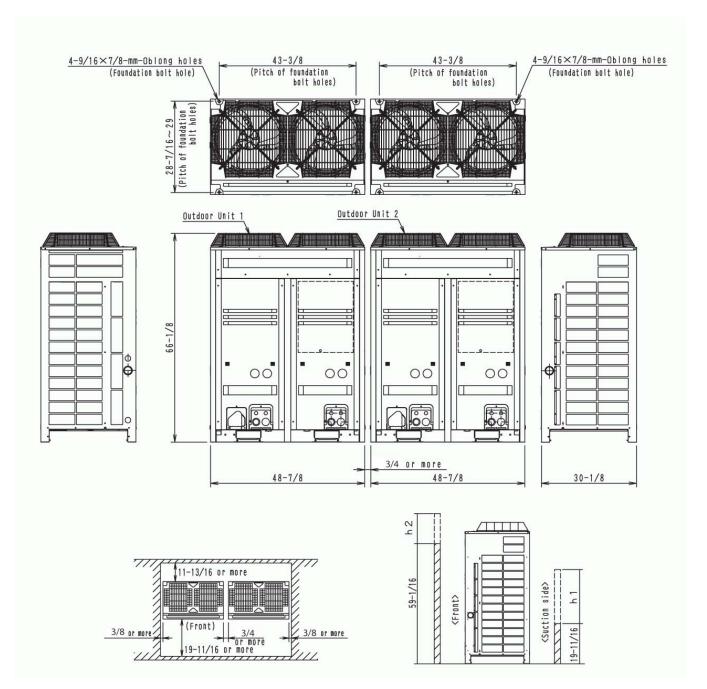



Submittal Data Sheet

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	



RXYQ240PBYD

Std U.S. Warranty: 7yrs Compressor, 1yrs Parts